

Reversal Osmosis Filter

- REVERSAL OSMOSIS FILTERS WORKS WITH A MEMBRANE WHERE WATER IS FILTERED UP TO A FINAL STAGE OF 0.0005 micron AND DO NOT ALLOW ENTERING OF UNWANTED SUBSTANCES, VIRUS, BACTERIUM AND PARASITES.
- COMBINE THREE PRE-FILTERING UNITS TO REMOVE SOLID PARTICLES AND ALUMINUM, CHLORINE, COPPER, CYANIDE, FLUORIDE, LEAD, MERCURY, SILVER PHOSPHATES, SALTS AND SULFIDE FROM WATER.
- TWO UNITS OF ACTIVATED CHARCOAL FOR ODORS REMOVING.
- DIAPHRAGM TYPE WATER PUMP, NOISELESS AND PUMPING CAPACITY IS 1 l/mm (0.264 gpm).
- INSTALLATION KIT PROVIDED, INCLUDING STAINLESS STEEL GOOSE NECK TYPE WATER DISPENSER.



WRO-1

Water Filter For Domestic and Commercial Ice-Maker

- REMOVE UNWANTED ODORS, LIKE CHLORINE, AND SOLID PARTICLES UP TO 20 micron.
- SHOCK RESISTANT PLASTIC BODY STAND UP TO 125 PSIG WATER PRESSURE.
- EASY INSTALLATION WITH PROVIDED COUPLERS IN EACH MODEL.
- FILTERING IS PROVIDED BY TWO INTERNAL MESH AT THE FILTER ENDS AND A GRANULAR ACTIVATED CHARCOAL BED BETWEEN.
- COMPRESSION COUPLERS.
- WATER TREATMENT CAPACITY ACCORDING TO THE FOLLOWING TABLE.



WF-1500BF



WF-1500QC



WF-1500WQC

Model	Gallons	Cubic Inches	Couplings		
			Material	Diameter	Type
WF-1500BF	1500	17	Bronze	1/4"ODF	Straight
WF-1500QC			Plastic		
WF-1500WQC			Plastic		

Replacement Filter Cartridges



WFC-101

SOLID CHARCOAL CORE CARTRIDGE

- FILTER IS COMPOSED OF AN INNER AND OUTER SKIRT OF SINTETIC MESH CAPABLE TO REMOVE SUBSTANCES LIKE CHLORINE AND PARTICLES UP TO 5 micron.
- SOLID CORE MADE OF ACTIVATED CHARCOAL.
- AVAILABLE IN THREE DIFFERENT SIZES.
- CARTRIDGES ARE INDIVIDUALLY SEALED IN A POLYETHILENE FILM.

Model	Dimensions		Microns	Flow Rate		Temperature Range	
	Diameter	Length		GPM	LPM	°C	°F
WFC-51	2-1/2"	4-7/8"	5	2.5	9.5	4.4 A 52	40 A 125
WFC-101		9-3/4"		5	19		
WFC-201		19-15/16"		7.5	28.4		



WFC-102

WFC-1 02 ACTIVATED CHARCOAL CARTRIDGE

- INTENDED AS A FINAL STAGE IN WATER FILTRATION REMOVING ALL UNWANTED ODORS.
- SOLID PLASTIC BODY CONTAINING TWO POLYPROPILENE MESH AND FILLED WITH ACTIVATED CHARCOAL.
- A MUST FOR COFFEE MACHINES, ICE MAKERS AND BEVERAGE DISPENSERS.
- CARTRIDGES ARE INDIVIDUALLY SEALED IN A POLYETHILENE FILM.

Model	Dimensions		Microns	Flow Rate		Temperature Range	
	Diameter	Length		GPM	LPM	°C	°F
WFC-102	3"	9-3/4"	20	1	3.79	4.4 A 52	40 A 125

WFC-103 WOUNDED POLYPROPILENE CARTRIDGE



WFC-103

- MADE FROM POLYPROPILENE FIBER TWISTED IN A CORD THAT IS WOUNDED AROUND A SOLID POLYPROPILENE CORE.
- IDEAL TO REMOVE SEDIMENTS, RUST AND OTHER SOLID PARTICLES WHEN INEXPENSIVE WATER FILTRATION IS REQUIRED.
- CARTRIDGES ARE INDIVIDUALLY SEALED IN A POLYETHILENE FILM.

Model	Dimensions		Microns	Flow Rate		Temperature Range	
	Diameter	Length		GPM	LPM	°C	°F
WFC-103	2-1/2"	9-3/4"	5	7.5	28.3	0 A 74	32 A 165

Replacement Filter Cartridges

WFC-104 SPUN POLYPROPYLENE CARTRIDGE

- MADE FROM COMPRESSED POLYPROPYLENE FIBERS FORMING A SOLID MATRIX WITH DENSITY VARIATION FROM OUTER TO INNER SURFACES OBTAINING DIFFERENT FILTRATION STAGES.
- DESIGN TO MEET STRICT REQUIREMENTS IN PROCESS RELATED TO CHEMICAL INDUSTRY BUT AFFORDABLE FOR DOMESTIC USE.
- INDIVIDUALLY SEALED IN A POLYETHYLENE FILM.



WFC-104

Model	Dimension		Micron	Flow Rate		Temperature Range	
	Diameter	Length		GPM	LPM	°C	°F
WFC-104	2-1/2"	9-7/8"	5	10	38	4.4 A 63	40 A 145

WFC-105 GROOVED POLYPROPYLENE CARTRIDGE

- MADE FROM COMPRESSED POLYPROPYLENE FIBERS FORMING A SOLID MATRIX WITH DENSITY VARIATION FROM OUTER TO INNER SURFACES OBTAINING DIFFERENT FILTRATION STAGES.
- CENTRAL RESIN CORE.
- DESIGN TO MEET STRICT REQUIREMENTS IN PROCESS RELATED TO CHEMICAL INDUSTRY BUT AFFORDABLE FOR DOMESTIC USE.
- INDIVIDUALLY SEALED IN A POLYETHYLENE FILM.



WFC-105

Model	Dimension		Micron	Flow Rate		Temperature Range	
	Diameter	Length		GPM	LPM	°C	°F
WFC-105	2-1/2"	9-7/8"	5	10	38	4.4 A 63	40 A 145

FILTER HOUSING

- MADE FROM REINFORCED POLYPROPYLENE.
- STAND INTERNAL PRESSURE UP TO 125 PSIG.
- MAXIMUM WORKING TEMPERATURE 125°C/257°F.
- AIR VENT VALVE INCLUDED.
- GREAT LOOK AND TWO DIFFERENT PRESENTATIONS AVAILABLE.
- TIGHTENING WRENCH, STANDING BASE AND MOUNTING SCREWS PROVIDED.
- IN AND OUT 3/4" NPT THREADED CONNECTION PORTS.



WFH-10B



WFH-10W

Model	Dimension		Color
	Diameter	Length	
WFH-10B	5-1/8"	12"	Blue
WFH-10W	5-1/8"	12"	Clear
WFH-20B	5-1/8"	23"	Blue



WFC-106C CERAMIC FILTER CARTRIDGE 10"

CERAMIC WATER FILTERS ARE AN INEXPENSIVE AND EFFECTIVE TYPE OF WATER FILTER, THAT RELY ON THE SMALL PORE SIZE OF CERAMIC MATERIAL TO FILTER DIRT, DEBRIS, AND BACTERIA OUT OF WATER.



WFC-110 RESIN BONDED CELLULOSE MELAMINE CARTRIDGE 10"

ANION EXCHANGE RESIN FILTER CARTRIDGE PROVIDES WATER SOFTENING IN A CONVENIENT, COMPACT CARTRIDGE. IT UTILIZES A BED OF SODIUM CATION BEADS TO REDUCE HARDNESS AND SCALE DEPOSITS. THIS IS A GREAT OPTION FOR TREATING HARD WATER IN A SPACE-SAVING DESIGN FOR A SMALL-SCALE SETTING. IF YOU NEED TO MINIMIZE POTENTIAL LIMESCALE BUILD-UP AND CLOGGING, THE WFC-110 RELIABLY DELIVERS.



WFC-107S POLYPROPYLENE CARTRIDGE 10"

THE CARTRIDGES CONTAIN FOOD GRADE SLOW MELT POLYPHOSPHATE THAT DISSOLVES SLOWLY IN WATER TO INHIBIT SCALE AND RUST BUILD-UP. THIS TYPE OF TREATMENT IS RECOMMENDED FOR USE WITH ICE MACHINES, COFFEE AND VENDING MACHINES, FOOD SERVICE EQUIPMENT, WATER HEATERS, AIR CONDITIONING EQUIPMENT AND MANY OTHER TYPES OF WATER PROCESSING EQUIPMENT.

WFV-5 WATER DISPENSER VALVES

- USED FOR BOTTLE TYPE WATER DISPENSERS.
- LEVER CAN BE LOCKED IN OPEN POSITION.
- RELIABLE SHUT OFF MECHANISM.

Model	Connector		Lever Color/Use
	Type	Size	
WFV-5R	Female	3/8" NPT	Red/Hot Water
WFV-5B	Female	3/8" NPT	Blue/Cold Water
WFV-5W	Female	3/8" NPT	White/Room Temp. Water



WF-006a QUICK STRAIGHT COUPLER CONNECTOR

- **ARTICCO'S** QUICK STRAIGHT UNION CONNECTOR PROVIDE FAST AND SECURE ASSEMBLING AND DISASSEMBLING OF PVC 1/4" OD HOSES USING WHEN INSTALL A WATER FILTER.
- EACH CONNECTOR COMES WITH TWO SECURE CLIPS TO LOCK THE HOSE IN IT'S PLACE.



WF-209 QUICK TEE CONNECTOR 1/4" O.D.

- **ARTICCO'S** QUICK TEE CONNECT PROVIDE FAST AND SECURE ASSEMBLING AND DISASSEMBLING OF PVC 1/4" OD HOSES USING WHEN INSTALL A WATER FILTER.
- EACH CONNECTOR COMES WITH THREE SECURE CLIPS TO LOCK THE HOSE IN IT'S PLACE.



FHT-3414 COMPRESSION X FHT ADAPTER

1/4" OD TUBE X 3/4" FEMALE HOSE THREAD



WFV-401 Water Dispenser Valve



WFV-401

- ELEGANT HIGH POLISHED CHROME FINISH.
- STAINLESS STEEL BASE WITH BRONZE MALE CONNECTOR 1/4" NPS.
- ALL NUTS AND GASKET ARE PROVIDED.
- APT TO BE USED IN COLD OR HOT WATER INDISTINCTLY.

WFV-700 Water Fountain Bubbler



WFV-700

- HEAVY DUTY BODY DESIGNED TO LAST FOR YEARS DELIVERING A STEADY STREAM OF WATER.
- FORGED BRASS BODY WITH AN ATTRACTIVE CHROME FINISH.
- WATER STREAM CAN BE EASILY ADJUSTED BY TURNING THE SCREW ON THE SIDE OF THE BODY.
- CONNECTION SIZE 3/8" NPS.

WFH-14P 1/4"ODF PVC Hose



WFH-14P

- FLEXIBLE PVC TUBING EXTERNAL DIAMETER 1/4" BY 100m /327.8 feet.
- USED FOR WATER FILTER INSTALLATION WITHOUT TASTE ALTERATIONS.

WP-5 WATER BOTTLE DISPENSER




WP-5

- USED FOR 19 liter (5gal) GLASS OR PLASTIC WATER BOTTLES.
- EASY INSTALLATION, OPERATION AND MAINTENANCE.
- DO NOT MAKE TASTE ALTERATIONS IN WATER.

WF-14QCK QUICK COUPLERS SET

- REPLACEMENT QUICK COUPLER SET FOR MODEL NUMBER **WF1500QC**.
- **USED WITH 1/4" OD PVC HOSES.**
- EACH CONNECTOR COMES WITH THREE SECURE CLIPS TO LOCK THE HOSE IN IT'S PLACE.

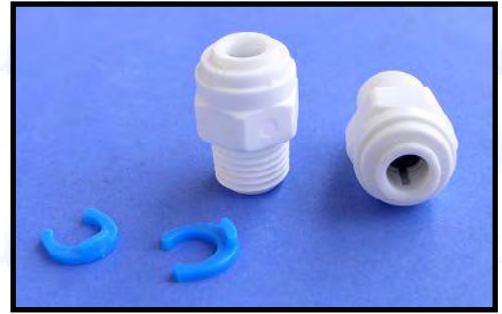

WTV-25K ICE MAKERS INSTALLATION KIT

ARTICCO NOW OFFERS A COMPLETE, ECONOMICALLY PRICED INSTALLATION KIT FOR ICE MAKERS AND HUMIDIFIERS.

- QFV-2 SELF TAPPING SADDLE VALVE.
- 25 FEET X 1/4" O.D PLASTIC TUBING.
- 1 HEXAGONAL NUT.
- 1 COMPRESSION UNION.
- 3 PLASTIC SLEEVES.
- 3 BRASS INSERTS.
- 1 MALE COMPRESSION / FEMALE FLARE CONNECTOR.
- INSTALLATION INSTRUCTIONS ENGLISH / SPANISH.



WTV-2K SELF TAPPING SADDLE VALVE

THIS IS THE QUICKEST, LEAK PROOF METHOD AVAILABLE FOR TAPPING INTO COPPER OR PVC TUBING SHUTDOWN, DRILLING OR CUTTING OF THE WATER LINE.

- CAN BE INSTALLED ON PIPES AND TUBING FROM 3/8" O.D. TO 1-3/8" O.D.
- MAXIMUM FLOW RATE 1 GPM / 3.8 LPM.
- THREADED BOTTOM BRACKET FOR EASY TO WATER LINE.
- OUTLET CONNECTION 1/4".
- STAINLESS STEEL PIERCING NEEDLE AND COMPRESSION GASKET COME STANDARD WITH EACH UNIT.
- IDEAL FOR INSTALLATION OF ICE MAKERS AND HUMIDIFIERS.

